

HIGH PERFORMANCE, VARIABLE SPEED DRUM PUMP MOTORS



Features:

- 650 watt continuous duty motor
- Infinitely variable electronic speed control
- 3,500 - 10,000 rpm speed
- Splash-proof, IP24 design
- Quick connection of motor to pump tube with unique collet design - no tools required
- Integral motor overload – moving switch to off position automatically resets overload
- Double wall thermoplastic motor housing reduces noise and vibration
- 115V or 230V, 50/60 Hz models for worldwide operation
- and approvals
- RoHS Compliant
- 12 foot (3.5 m) cord with plug
- For use on all PF, TB and TBP Series pump tubes
- Made in the U.S.A.



PFP with M3V motor

| Model | Part Number | Electrical Requirements | Plug Type |
|--------|-------------|-------------------------|------------|
| M3V | 106655 | 115 VAC/50-60 Hz | NEMA 5-15P |
| M5V | 106658 | 230 VAC/50-60 Hz | CEE7/4 |
| M5V-US | 106657 | 230 VAC/50-60 Hz | NEMA 6-15P |

| Pump Model | Max. Flow | | Max. Head | | Max. Viscosity | Max. SG |
|------------|-----------|------|-----------|------|----------------|---------|
| | gpm | lpm | ft. | m | cP | |
| PF | 40 | 151 | 80 | 24 | 500 | 1.83 |
| TB | 20 | 75.7 | 28 | 8.53 | 200 | 1.4 |
| TBP | 20 | 75.7 | 39.5 | 12 | 200 | 1.4 |


NISUS (THAILAND) CO., LTD.

Tel : 0-2898-8901-3 , Fax : 0-2898-7745

www.nisusthailand.co.th

www.nisusthailand.com

E-mail : info@nisusthailand.co.th

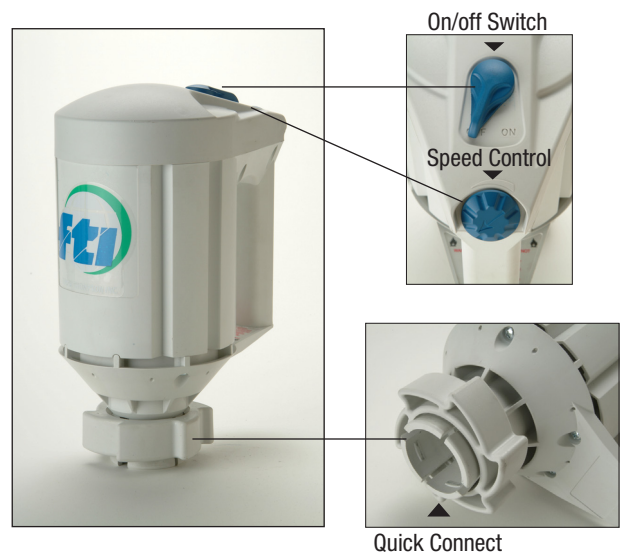

921 Greengarden Road • Erie, PA 16501-1591 U.S.A. • PH 814-455-4478 • Fax 814-455-8518
Email fti@finishthompson.com • www.finishthompson.com